

1 SCALA2 3-45 A



: 99027073

SCALA2 Grundfos

. SCALA2

SCALA2

- 1.
- 2.
- 3.

SCALA2

- 
- 
- 
- 
- 

5

8

24

5

8



53

SCALA2




: 0 .. 45 °C

: 20 °C  
 : 998.2 / 3  
 :  
 : 3 3/  
 : 27  
 : CARBON/CERAMIC  
 : CE,VDE,EAC  
 Approvals for drinking water: WRAS,ACS  
 - : ISO9906:2012 3B  
 :  
 Pump: Composite  
 NORYL FE1630PW PPE+PS-GS30  
 :  
 , EN/DIN: NORYL FE1630PW PPE+PS-GS30  
 :  
 : 0 .. 55 °C  
 : 10  
 Maximum permissible inlet pressure: 6  
 Type of inlet connection: R  
 Type of outlet connection: R  
 : 1 inch  
 : 1 inch  
 : PN 10  
 :  
 - P1: 550  
 : 50 / 60 Hz  
 : 1 x 200-240  
 : 2.8 A  
 (IEC 34-5): IPX4D  
 Insulation class (IEC 85): F  
 : 2  
 : Type E/F (CEE7/7)  
 Power plug:  
 :  
 : 9.55  
 ( ): 12  
 : 0.044 3  
 : -40 .. 70 °C  
 C : RS  
 : 8413707500

## 99027073 SCALA2 3-45 A

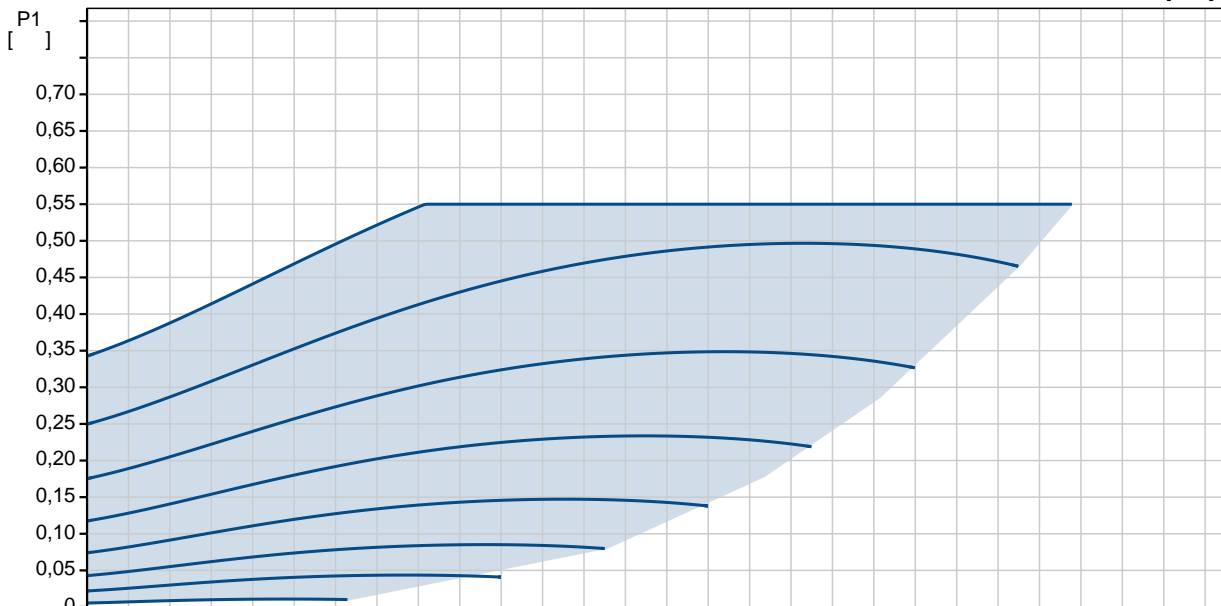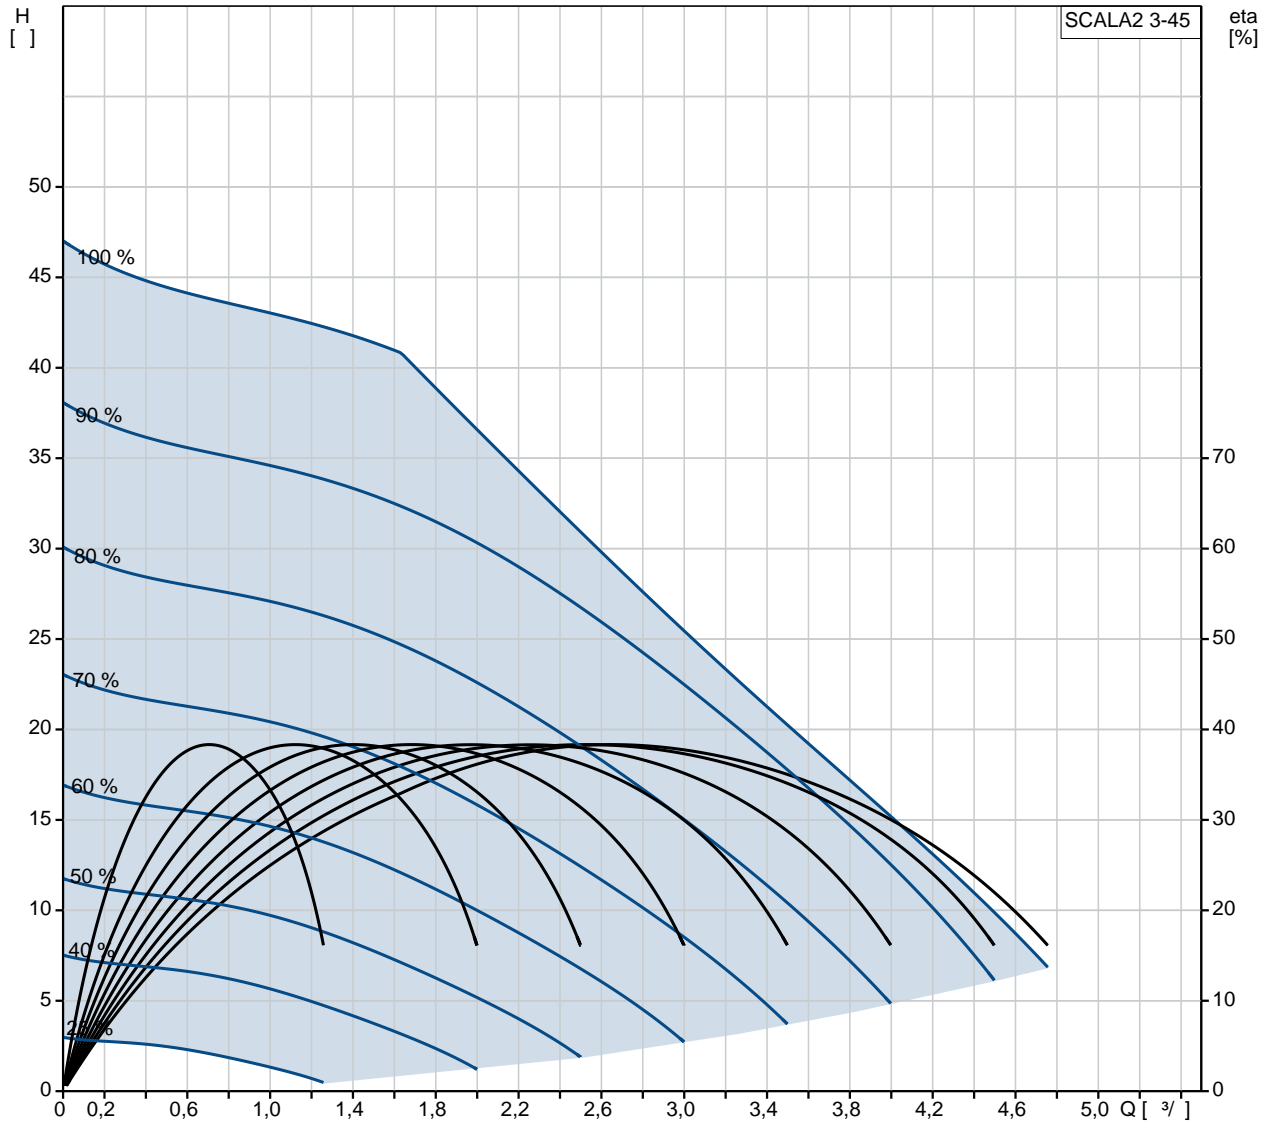

	SCALA2 3-45 A
	99027073
EAN	5712605354444
	5712605354444
	358,00 €
	3 ³/
	27
	45
	CARBON/CERAMIC
	CE,VDE,EAC
Approvals for drinking water:	WRAS,ACS
	ISO9906:2012 3B
	A
	Composite
Pump:	NORYL FE1630PW PPE+PS-GS30
	NORYL FE1630PW PPE+PS-GS30
	A
	0 .. 55 °C
	10
Maximum permissible inlet pressure:	6
Type of inlet connection:	R
Type of outlet connection:	R
	1 inch
	1 inch
	PN 10
	0 .. 45 °C
	20 °C
	998.2 / ³
	- P1: 550
	50 / 60 Hz
	1 x 200-240
	2.8 A
(IEC 34-5):	IPX4D
Insulation class (IEC 85):	F
	2
	Type E/F (CEE7/7)
Power plug:	
	9.55
( ):	12
	0.044 ³
	-40 .. 70 °C
C	RS
	8413707500

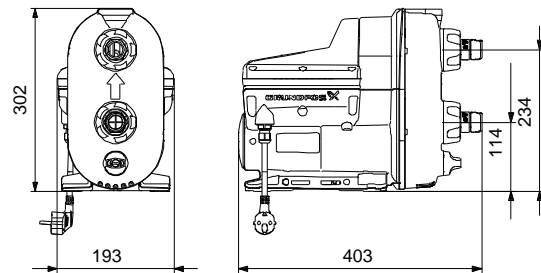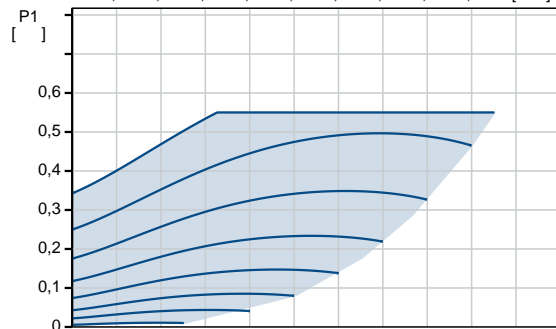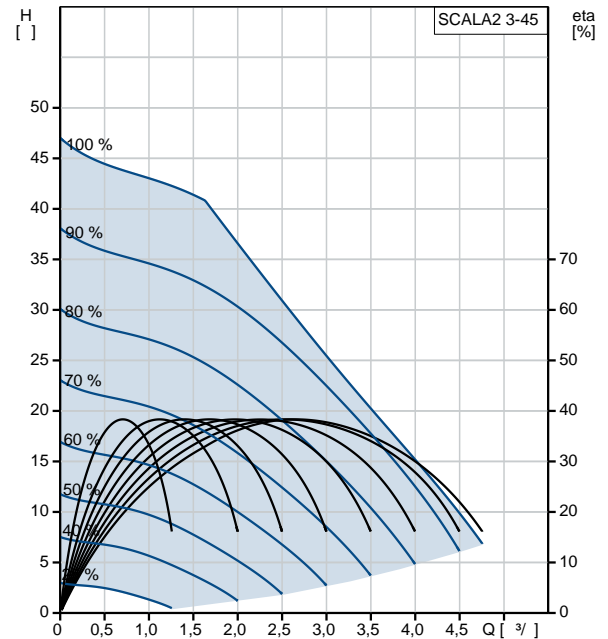

## 99027073 SCALA2 3-45 A

