

«Perfo Box» series of Filters and MultiPlexers

Band Pass Filter PB-F1500, 21MHz (15m), 1500Watts ICAS

SKU: PB-F1500-21

Typical specifications*:


* Subject to change without prior notice, please see actual specification as measured

** Intermittent Commercial and Amateur Service, (CW - 50% Duty cycle)

- Filter Impedance: 50 Ohm
- Power Rating: 1500W ICAS**, max VSWR 1,5:1
- Insertion loss: ≤0,5db
- Return Loss: ≥20db
- VSWR: ≤1,15:1
- RF Connector Type: SO-239 (UHF female)
- Dimensions (L x W x H) mm/inches: 450 x 150x 140 mm / 17,7" x 5,9" x 5,5"
- Net weight, kg/lbs.: ≤2,1 kg / 5,0 lbs.

Measured specifications, serial number #0720-229:

adjacent bands attenuation (S21), VSWR and Insertion loss (S11)

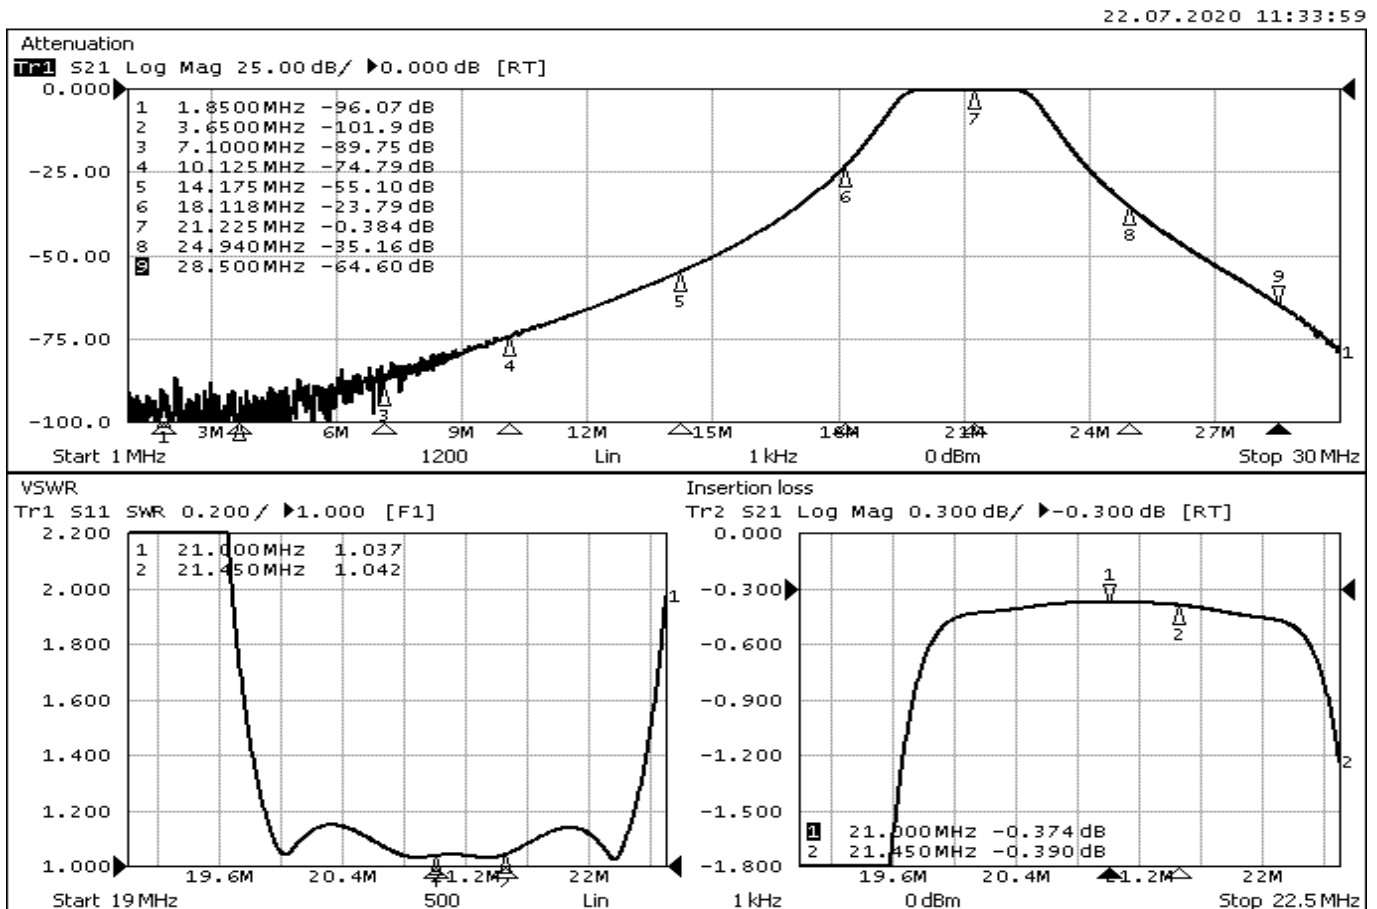

QC:

11 September, 2020

Page 1 of 1



LowBandSystems

Tel.: 007 918 557 45 07 (WhatsApp, Viber)

E-mail: ra6lbs@gmail.com

Volgodonsk, 347382, Russian Federation

www.lowbandsystems.com