

CONVERS 220 DOUBLE

Retractable Dual Monitor

ELEMENT
ONE

DOUBLE




„visulutionary“

[ˈvɪʒuˈluːʒənəri] ADJ:

describes the feeling and impression
you get when you use unique integrated
monitor solutions from ELEMENT ONE™

CONVERS 220 DOUBLE

Retractable Dual Monitor

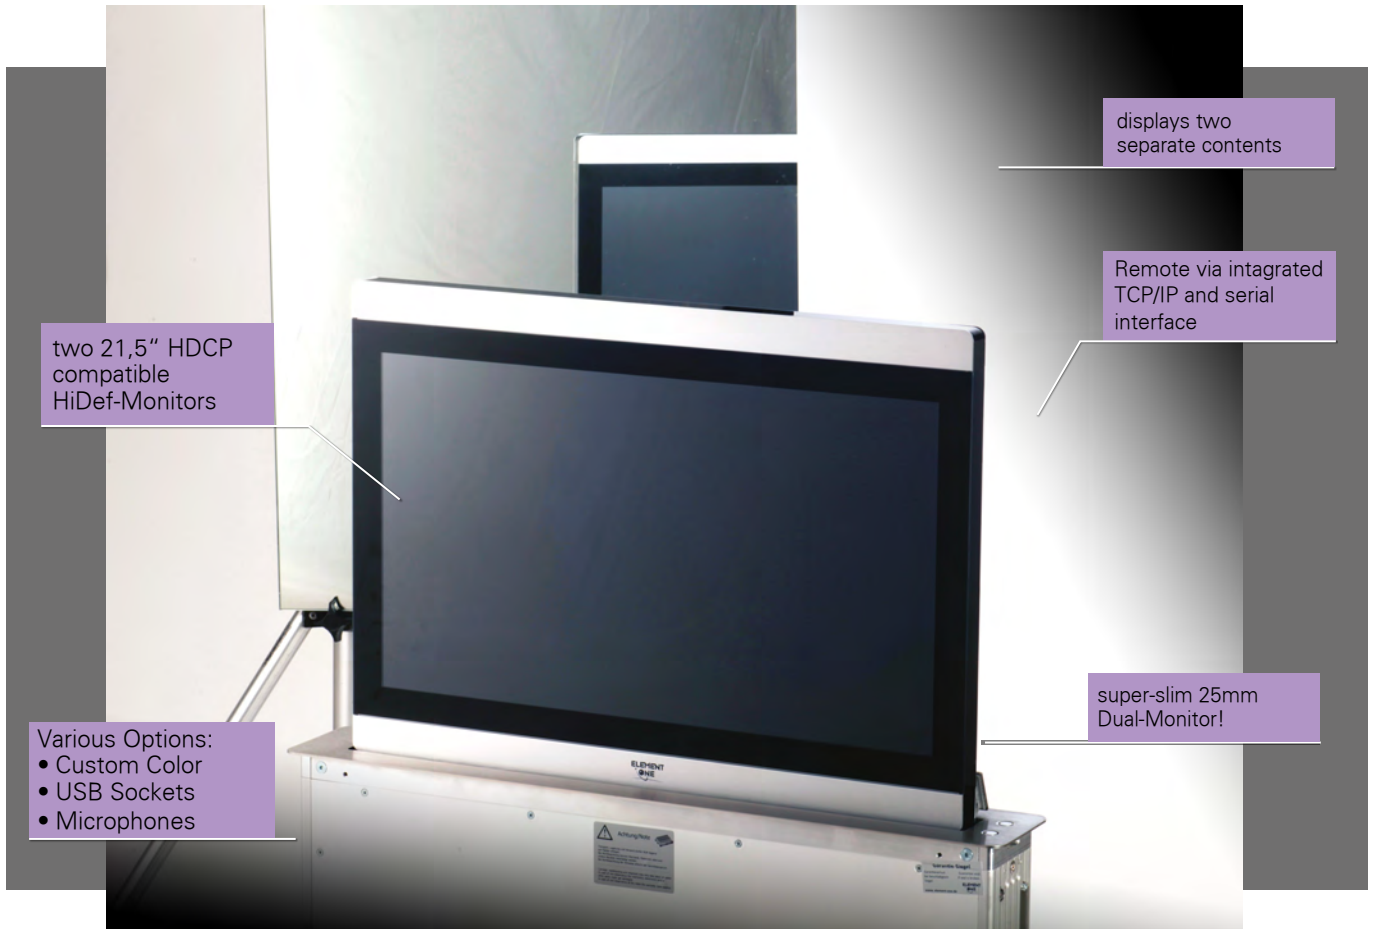

„What is CONVERS DOUBLE“

The CONVERS DOUBLE is unique - and it is and remains **the Original** ist. ELEMENT ONE invented the idea of two back-to-back Monitors in one super-slim housing and made them fully retractable.

With a single touch the display panel elevates with a whisper from the housing below.

Designed to encourage interaction within the meeting space it can then disappear as silently & quickly as it appeared to allow the 'parties' interaction & discourse to continue un-obstructed

Digital and analogue video interface - individual input for each display!

Smart Design:

most compact 2 x 21,5" - integrated Monitor available in the market

The Original from leading European
Designed and manufactured in Germany
5 years warranty
10 years spare part availability

Sleek. Silent. Svelte. Handcrafted & tested to ensure the highest standards.

Reliable partner with solid repeat business across diverse client fields. Global references and project experiences



CONVERS 220 DOUBLE

Retractable Dual Monitor



GENERAL SPECIFICATIONS

Functionality	Motorised Dual Monitor Single Touch electronic Anti Clamp Protection
Motor & Mechanics	Precise 12V motor Maintenance Free Virtually Silent – 40 dB
Material	Frame - Aluminum silver anodized Trim - Black acrylic decorative inlay Chassis & Cartouche - Brushed high-grade steel
Display	3 mm Antireflective coated protective glass
Dimensions	620 x 100 x 587 mm
Weight	184 kg
Inclination	0°
Elevated Height	365 mm
Monitor (2x)	Full HD 21.5" LED Backlit TFT HDCP Compatible Active Matrix Widescreen Format
Brightness	250 cd/m ²
Contrast Ratio	1000:1
Resolution	1920 x 1080 – Full HD (16:9)
Pixel size	0.1989 x 0.1989 mm
Viewing Angle	Horizontal 178°/Vertical - 178°
Viewing Area	475,20 (H) x 267,30 (V)
LED Lifespan	Up to 50,000 hrs


Video Interface	2xDVI (Socket) 2x VGA (Socket)
Remote Control	TCP/IP on-board via RJ45 9-PIN d-sub serial For device control, setup of the movement parameter, firmware-Update (E1-cable and software required)
Power Consumption	15W
Certifications	TüV, CE, FCC
Warranty	5 Years Mechanical / 2 Years Optical Extendable at inception with surcharge E&OE Sustainable materials and manufacturing

SCOPE OF SUPPLY

External Power Supply
Power Cord – 1.5 m
Output: 12V, 5A
Input: 100 - 240V, 50/60Hz, 1,5A

AVAILABLE OPTIONS

Integration from Below – R Version
Custom Colour – Anodization or Coating
Custom Plexiglass Trim Colour
Custom Logo
Additional sockets – USB / XLR / Phono / Video
Leather Trim
Conference Microphone

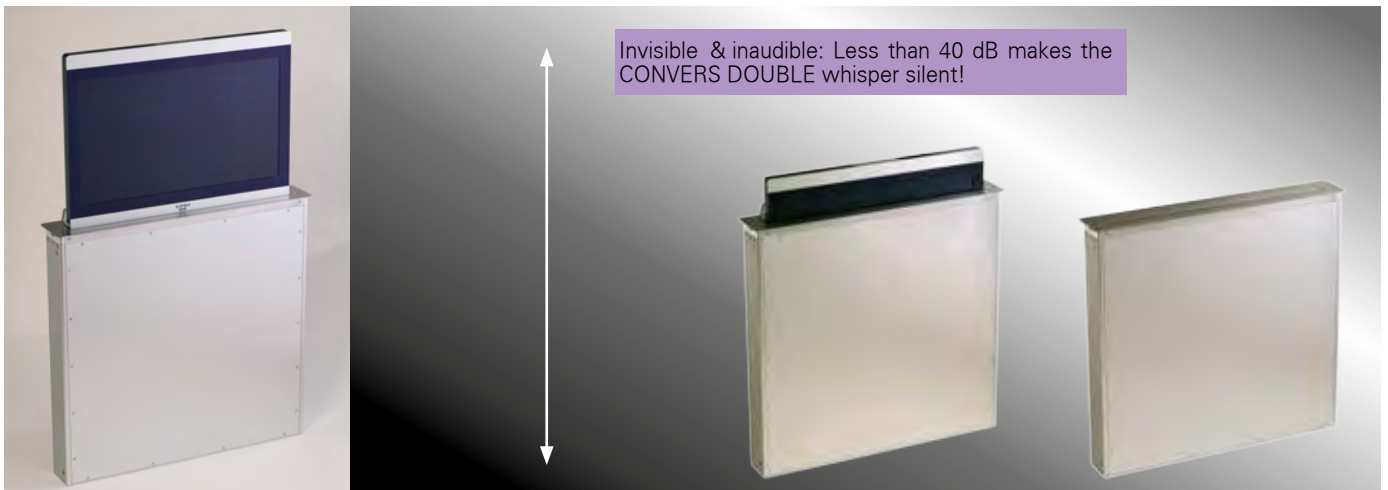

CONVERS 220 DOUBLE

Retractable Dual Monitor



Application

- POS
- Bank
- Hotel
- Administration
- Senat

