

SP Series

SSP12-7 12V7Ah



Официальный дилер в РФ
www.UPS-LAB.ru
+7 (495) 109-90-77



SP series VRLA battery uses AGM technology and high-purity raw materials. Its good floating back up and large current discharge performance makes it optimal and economical choice for UPS/EPS.

Benefits

- Standard Commercial according to EUROBAT Classification
- Maximum charge efficiency
- High gas recombination efficiency
- Low self-discharge rate
- Easy installation and handling
- Vertical or horizontal installation


Applications

- UPS units
- Emergency power
- Starting generators
- EPS units

Standards

- IEC 61056-1/2
- JIS C8702-1/2
- EUROBAT guide

Drawing

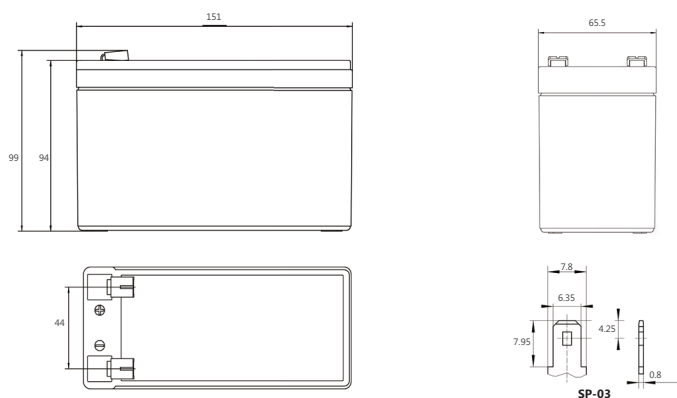

Specifications


Battery Model	SSP12-7			
Design Life (years, 25°C)	5			
Capacity (Ah, 25°C)	20HR (0.35A, 1.75V)	10HR (0.65A, 1.75V)	5HR (1.27A, 1.75V)	1HR(4.534A, 1.70V)
	7	6.5	6.35	4.534
Dimensions (mm)	Length	Width	Height	Total Height
	151	65.5	94	99
Approx. Weight (kg)	2.15			
Reference Internal Resistance (mΩ)	23 (full charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	105			
Self-Discharge (25°C)	< 3% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.45 (-4mV/°C/cell), max charge current: 2.1A		2.27 (-3mV/°C/cell)	
Short Circuit Current (A)	190			

Discharge Data


Constant Current Discharge Data (25°C, A)													
End Voltage (V/cell)	min						h						
	5	10	15	20	30	45	1	1.5	2	3	5	10	20
1.60	31.50	18.94	13.61	11.13	7.887	5.788	4.636	3.349	2.700	2.000	1.298	0.659	0.354
1.65	30.24	18.43	13.36	11.02	7.812	5.727	4.592	3.307	2.668	1.975	1.291	0.657	0.353
1.67	29.48	18.17	13.19	10.92	7.752	5.672	4.561	3.284	2.653	1.967	1.285	0.656	0.353
1.70	28.58	17.93	13.03	10.80	7.692	5.633	4.534	3.265	2.640	1.957	1.281	0.655	0.352
1.75	25.20	17.22	12.60	10.50	7.490	5.507	4.445	3.220	2.606	1.938	1.270	0.650	0.350
1.80	20.16	15.50	11.72	9.940	7.190	5.325	4.343	3.165	2.569	1.915	1.256	0.644	0.348

Constant Power Discharge Data (25°C, W/cell)													
End Voltage (V/cell)	min						h						
	5	10	15	20	30	45	1	1.5	2	3	5	10	20
1.60	57.40	36.11	26.26	21.57	15.34	11.30	9.091	6.592	5.335	3.964	2.581	1.313	0.708
1.65	55.39	35.20	25.83	21.42	15.23	11.21	9.023	6.522	5.282	3.920	2.572	1.311	0.708
1.67	54.35	34.77	25.56	21.25	15.13	11.11	8.977	6.487	5.257	3.909	2.562	1.310	0.708
1.70	52.87	34.36	25.28	21.05	15.04	11.06	8.936	6.460	5.240	3.897	2.558	1.309	0.707
1.75	46.75	33.11	24.49	20.50	14.67	10.83	8.779	6.387	5.183	3.866	2.541	1.302	0.703
1.80	37.75	29.92	22.84	19.46	14.13	10.51	8.604	6.293	5.123	3.826	2.518	1.293	0.700


Performance Curve

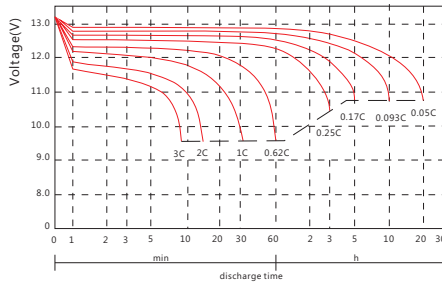


Discharge voltage vs. discharge time

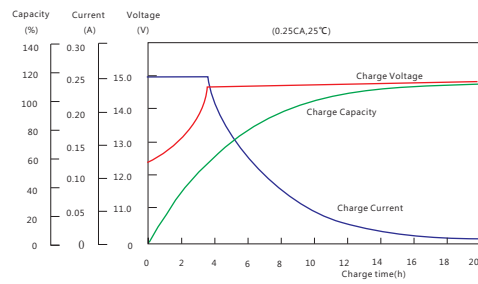

Charge capacity vs. charge time

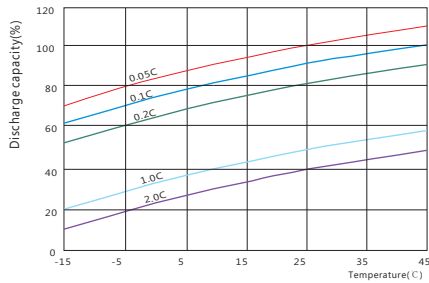

Discharge capacity vs. temperature

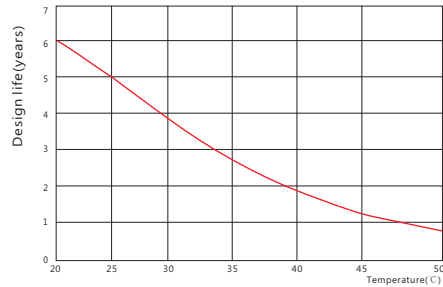

Design life vs. temperature

Sacred Sun Power Sources Co., Ltd.

No.1 Shengyang Road Qufu City, PRC
 sales@sacredsun.cn

Sacred Sun Asia Pacific

No. 15, Yishun Industrial Street 1,
 #01-17, WIN5, Singapore 768091
 sales.asia@sacredsun.cn

Sacred Sun Europe SPRL

Schoenstraat 96-9140 Temse, Belgium
 sales.eu@sacredsun.cn

Sacred Sun MEA FZE

S10122A1019 Jebel Ali, Dubai,
 United Arab Emirates
 sales.mea@sacredsun.cn