

CONVIS 125

Conference Monitor



CONVIS



„visulutionary“

[ˈvɪʒuˈluːʒənəri] ADJ:

describes the feeling and impression
you get when you use unique integrated
monitor solutions from ELEMENT ONE™

CONVIS 125

Conference Monitor





GENERAL SPECIFICATIONS

Functionality	Compact & slim 12.5" FullHD Conference Monitor
Material	Aluminum, anodized silver (brushed) stainless steel, powdercoated black, Acrylic glass, tempered
Dimensions	320 x 120 x 195 mm
Tilt Angle	30°
Monitor Thickness	8 mm
Monitor Specs	Full HD 12,5" LED Backlit TFT HDCP compliant Active Matrix Widescreen Format Brightness 400 cd/m ² Contrast (typ.) 700:1 Resolution 1920 x 1080 – Full HD (16:9) Pixel pitch 0.144mm x 0.144mm (176ppi) Color depth 6-bit, 262.144 colors Viewing Angle Horizontal 160° / Vertical 140° Viewing area 276.480(H) x 155.520(V) LED Life time ca. 50,000 hrs

Mass	2,3 kg
Environment	0° - 50°C
Video Interface	HDMI, Display Port
Power Consumption	7 Watt (w. LED Illumination 9 Watt)
Certificates	CE, FCC, RoHS/WEEE compliant
Warranty	2 Years (extendable on demand) Spare part availability 5 Years

SCOPE OF SUPPLY

HDMI Cable
Power Adapter - Input: 100-240V~, 50/60Hz, 5A
Output: 12V 5.0A 60W
MAX, (Cable length DC ~140 cm)
Power Cord 1,5 m

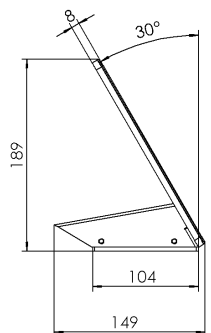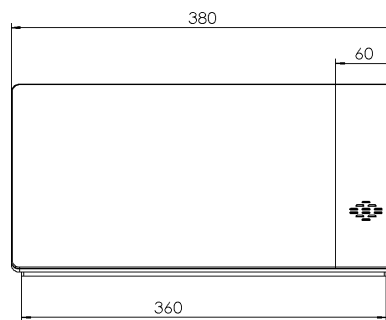

... 8mm Aluminum Monitor



For Rental & System Integration

Einsatzgebiete:
Conference
Meeting
Senat

... timeless - elegant

ELEMENT ONE Multimedia GmbH
Zum Murgdamm 5
D-76456 Kuppenheim
Tel. +49 (0) 7222 96654-0
Fax +49 (0) 7222 96654-29
www.element-one.de
info@element-one.de

CONVIS 125

Conference Monitor



ADDITIONAL SPECIFICATIONS OPTION "BRAEHLER DIGIMIC LEAN+"

Digital audio

- latency time approx 1 ms
- low susceptibility to mobile phone interference like bluetooth, UMTS, WiFi etc.
- high quality digital audio: Sample Rate: 48 kHz Frequency response: 20 - 20,000 H

Audio device interfaces

- ADAT input and output
- AES/EBU input and output (XLR)
- One analogue input (IN) XLR balanced
- Five analogue outputs XLR-plug: 1 Master+ 1 separate for each line

Connection of units

- UNITS L1 ... L4 (D9 connector) for up to 100 delegate units on four chains
- or several interpreter consoles on one chain and delegate units on the other chains
- line extension with power supply DExt

Microphone Modes

- AUTOMATIC - Each delegate can switch himself on and off
- AUTOMATIC NEXT/FLOAT
- MANUAL - Each delegate can put himself into a request list
- PRIORITY - Chairperson can override all other delegates
- VOX - Voice activation



Talk-Button | MiniCON Mic Interface | Head Phone socket | Volume Control





DCEN mini - Central Control Unit (not in scope of supply)



RJ45 Interface for CMic Line up to 25 delegate (with DCEN Mini)



Video Interface DisplayPort & HDMI

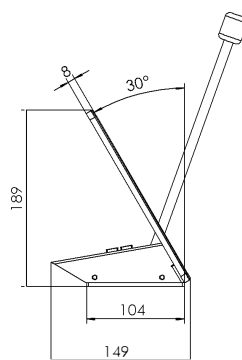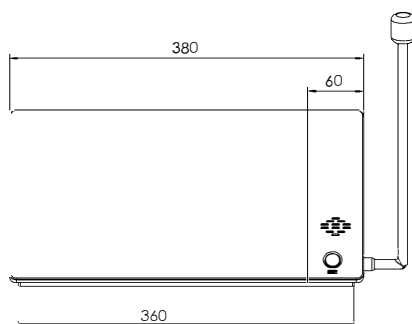

ELEMENT ONE Multimedia GmbH
 Zum Murgdamm 5
 D-76456 Kuppenheim
 Tel. +49 (0) 7222 966 54-0
 Fax +49 (0) 7222 966 54-29
www.element-one.de
info@element-one.de