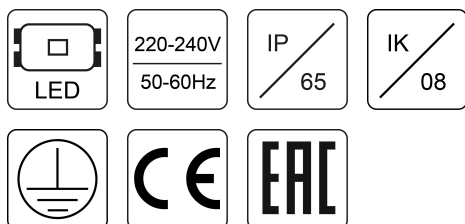


LIBRA 3PLED B234 CLR TEST • 1010531

Product:	Libra 3PLED B234 CLR TEST
Order code:	1010531
Family:	Libra LED
Product group:	Emergency lighting

GENERAL DATA

Description:	A surface LED emergency exit sign with IP65 degree of protection and extremely robust housing for both mains and emergency operations in escape routes and open areas Diffuser: opal or clear polycarbonate, impact resistant Body: polycarbonate, white finish, with LED status indicator and test button Battery charging time: 24 hours Battery: NiCd Recognition distance: 20 meters
Installation:	Designed to be fixed onto walls of any type, including flammable surfaces. Supplied with legend kit ("Exit", "Left" and "Right"). Push-in terminal, 3x2x2.5mm ²
Environment	Indoor
Application	emergency lighting

ELECTRICAL DATA

Mains voltage:	220-240V, 50-60Hz	System power*, W:	1
Power factor:	0.3	Control gear:	ECG on/off
Illumination mode:	M/NM	Emergency operating time, h:	3
Connection:	Push-in terminal, 3x2x2.5mm ²		

LIGHTING DATA

Light source and cap, W:	LED	Light source included:	yes
CRI (Ra):	70+	CCT, K:	6500
LED lifetime, h:	50000/L70B50		

TECHNICAL DATA

Net weight, kg:	1.35	Quantity in package, pcs:	1
Packaging volume, m³/pcs:	0.003108	Pallet quantity, pcs:	250

STANDARDS

Operating temperature range, °C:	ta 0...+40	Protection class IEC:	I
Ingress protection code:	IP65	Mechanical impact resistance:	IK08
Certificates:	CE, RoHS	Warranty:	2 years
Technical drawing (.jpg)			



Note:

*: M-maintained (with an option of connecting as non-maintained), NM- non-maintained, system power and output indicates data in emergency mode, tolerance range for optical and electrical data: $\pm 10\%$, values apply to an ambient temperature of 25°C
