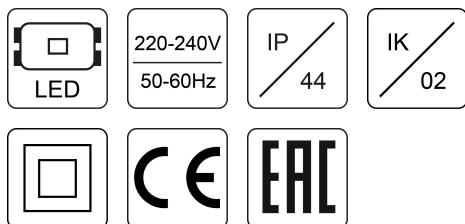


**NASHI S 3PLED C434 TEST • 1021448**

Product:	Nashi S 3PLED C434 TEST
Order code:	1021448
Family:	Nashi S LED
Product group:	Emergency lighting

**GENERAL DATA**

<b>Description:</b>	A surface double-sided LED emergency exit sign with IP44 degree of protection for both mains and emergency operations Diffuser: acrylic glass, clear Body: polycarbonate, white finish, with LED status indicator Battery charging time: 24 hours (12 hours optional: AUT) Battery: NiCd (LiFePO4 optional: AUT) Recognition distance: 25 meters Deep discharge protection
<b>Installation:</b>	Designed to be fixed onto ceiling or wall of any type, including flammable surfaces, or suspended. Suspension kit is not included. Supplied with legend kit ("Exit", "Left" and "Right"). Screw terminal, 3x2x2.5mm2
<b>Environment</b>	Indoor
<b>Application</b>	emergency lighting

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 50-60Hz	<b>System power*, W:</b>	1
<b>Power factor:</b>	>0,60	<b>Control gear:</b>	ECG on/off
<b>Illumination mode:</b>	M/NM	<b>Emergency operating time, h:</b>	3
<b>Connection:</b>	Screw terminal, 3x2x2.5mm2		

**LIGHTING DATA**

<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>CRI (Ra):</b>	80+	<b>CCT, K:</b>	6500
<b>LED lifetime, h:</b>	50000/L80B50		

**TECHNICAL DATA**

<b>Net weight, kg:</b>	1.2	<b>Quantity in package, pcs:</b>	1
<b>Packaging volume, m3/pcs:</b>	0.003651912	<b>Pallet quantity, pcs:</b>	210

**STANDARDS**

<b>Operating temperature range, °C:</b>	ta 0...+40	<b>Protection class IEC:</b>	II
<b>Ingress protection code:</b>	IP44	<b>Mechanical impact resistance:</b>	IK02
<b>Certificates:</b>	CE, RoHS	<b>Warranty:</b>	2 years
<b>Technical drawing (.jpg)</b>			

