

## Gel seal weather shield for coaxial connector junction 1/2" jumper to 1-5/8" feeder

The WSHIELD gel closure provides additional weather protection for coaxial junctions. Its innovative gel seal makes it a trouble free and safe solution

**Kit content**

- Central part with integrated gel seal
- Closing channel
- Installation instruction



Picture shows WSHIELD-12-78 for illustration purpose

**FEATURES / BENEFITS**

- ➞ Quick and easy to install
- ➞ Easy removable and re-usable
- ➞ No tape, no mastic or tools required for installation
- ➞ EU and China RoHS compliant

### Technical Features

**STRUCTURE**


<b>Product Line</b>		Coaxial Cable Accessories
<b>Product Type</b>		Weather Seal Kit
<b>Installation Hardware Type</b>		Weatherproofing Kit

**MECHANICAL SPECIFICATIONS**

<b>Mated to Cable Size and Interface</b>		1/2" to 1-5/8" up to and included 7-16 DIN connectors
<b>Color</b>		Black
<b>Material</b>		PP (Polypropylene)
<b>Sealing Class</b>		IP68
<b>Length</b>	mm (in)	260 (10.23)
<b>Height</b>	mm (in)	84 (3.3)
<b>Width</b>	mm (in)	110 (0.97)

**PACKAGING INFORMATION**

<b>Package Quantity</b>		6
<b>Weight per piece</b>	kg (lb)	0.44 (0.97)

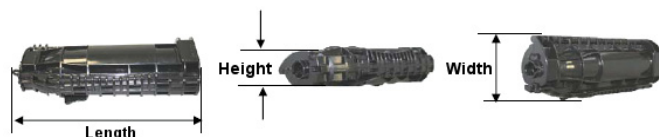

**External Document Links**

**Notes**

- ➞ Outer diameter jumper cable 13 - 17 mm (.512 - .669 in)
- ➞ Outer diameter feeder cable 49.5 - 52 mm (1.949 - 2.047 in)
- ➞ Maximum connector diameter 68 mm (2.677 in)
- ➞ Maximum length of the connection 208mm (8.189 in)