



- High power density 4.9w/in³
- AC input active surge current limiting
- AC input range selected by switch
- Short circuit, overload, over voltage, over temperature protection
- Forced air cooling by built-in DC fan
- Built-in remote sense function
- UL approved
- Low cost
- 2 years warranty




SPECIFICATION

MODEL	SE-600-5	SE-600-12	SE-600-15	SE-600-24	SE-600-27	SE-600-48	
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	27V	48V
	RATED CURRENT	100A	50A	40A	25A	22.2A	12.5A
	CURRENT RANGE	0 ~ 100A	0 ~ 50A	0 ~ 40A	0 ~ 25A	0 ~ 22.2A	0 ~ 12.5A
	RATED POWER	500W	600W	600W	600W	599.4W	600W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p
	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V	10 ~ 13.5V	13.5 ~ 16.5V	22 ~ 26.4V	24 ~ 30V	43 ~ 56V
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
SETUP, RISE, HOLD TIME	1000ms, 50ms, 16ms/230VAC 1000ms, 50ms, 14ms/115VAC at full load						
INPUT	VOLTAGE RANGE	90 ~ 132VAC / 180 ~ 264VAC selected by switch 254 ~ 370VDC					
	FREQUENCY RANGE	47~63Hz					
	EFFICIENCY (Typ.)	78%	83%	84%	87%	87%	88%
	AC CURRENT	12A/115VAC	7.5A/230VAC				
	INRUSH CURRENT (max.)	30A/115VAC	50A/230VAC				
LEAKAGE CURRENT	<2.0mA / 240VAC						
PROTECTION	OVER LOAD	105~125% of rate load Protection type : Shut down o/p voltage, re-power on to recover					
	OVER VOLTAGE	5.75 ~ 6.3V	13.8 ~ 16.2V	18 ~ 21V	27.6 ~ 32.4V	31 ~ 36.5V	57.6 ~ 67.2V
	OVER TEMPERATURE	85°C ±5°C (TSW1 : Detect on heatsink of power transistor) Protection type : Shun down o/p voltage, recovers automatically after temperature goes down					
ENVIRONMENT	WORKING TEMP., HUMIDITY	-10~+60°C (Refer to output load derating curve), 20~90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40~+85°C, 10~95% RH					
	TEMP. COEFFICIENT	±0.05%/°C (0~50°C)					
	VIBRATION	10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC	SAFETY STANDARDS	UL60950 Approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC					
OTHERS	MTBF	197K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	247*127*63.5mm (L*W*H)					
	PACKING	2Kgs/pcs, 6pcs/12Kgs/0.76CUFT					
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p>						

Mechanical Specification

Case No. 926 Unit:mm

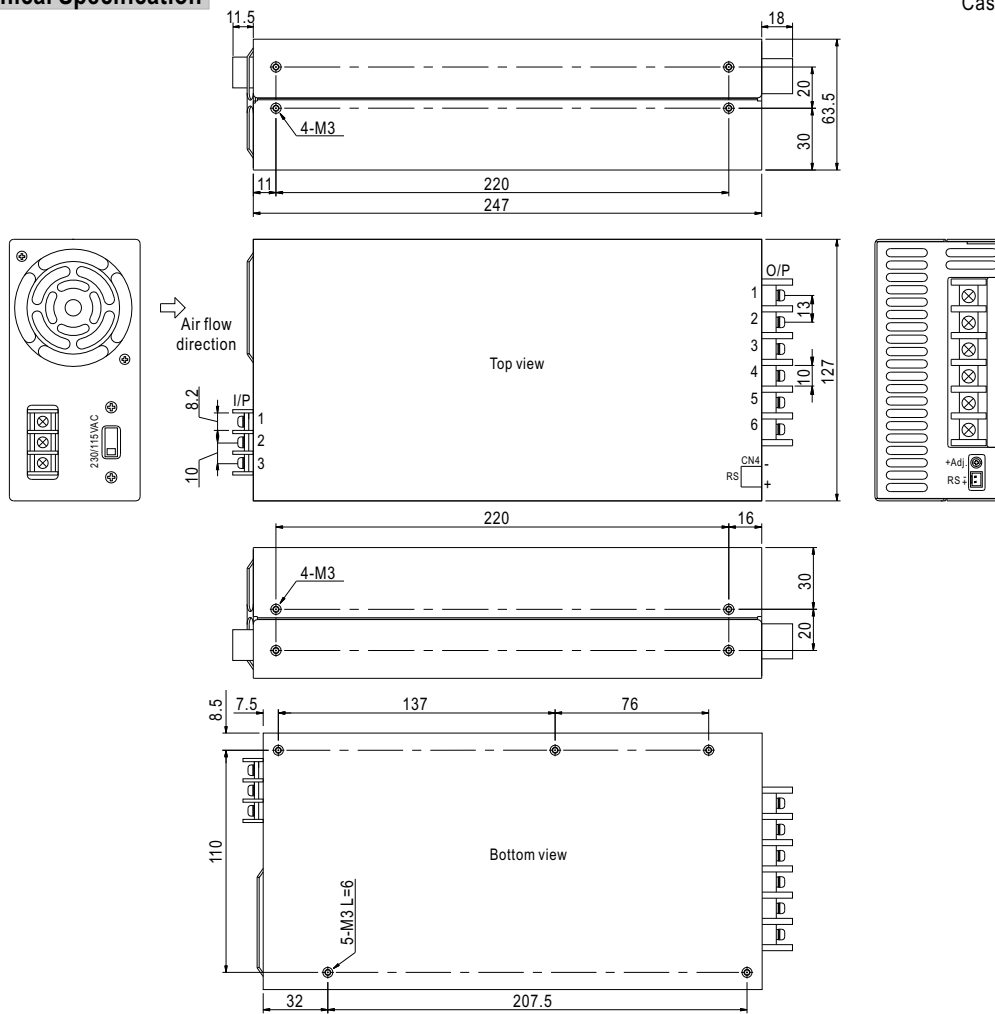

AC input terminal :

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG


DC Output terminal :

Pin No.	Assignment
1~3	+V
4~6	-V

RS Connector (CN4) : JST B-XH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	+S	JST XHP or equivalent	JST SXH-001T or equivalent
2	-S		

Derating Curve

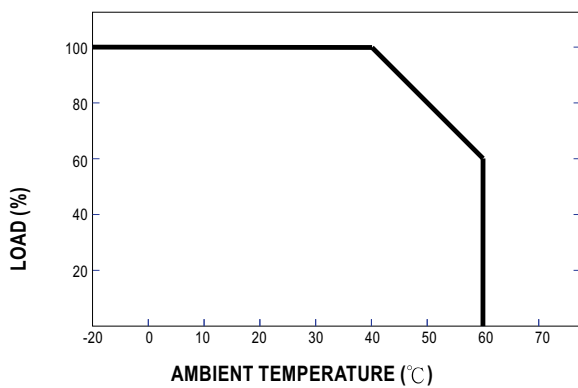

Static Characteristics

